



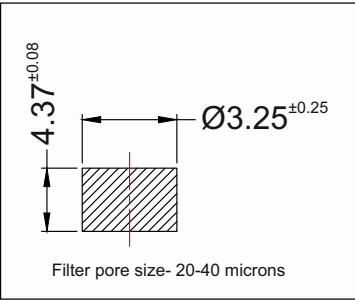


Description	200µl Tips	200µl Filter Tips
Maximum Volume	200µl	200µl
Autoclavable	Yes	No
Certified RNase, DNase, DNA and Pyrogen free	Yes	Yes
Hazards Data	Health Flammability Reactivity 0 Non-hazardous 1 Flammable (Class A fire) 0 Non-reactive *Consult the polymer MSDS for further information on potential hazards associated with this material.	
Production Standards & Procedures	Product is produced under controlled environment. All personnel are capped, masked, gloved and gowned in the assembly area. Lot size is variable due to continuous moulding process. Tip Filters are specifically designed to help prevent liquid bypass, cross contamination and airborne contamination from being drawn in to the Tips, thus protecting the pipette body from contamination. This Product is manufactured to the following specifications: Magnified visual examination for flash (+0.02in).	
Low Retention Tips & Regular Tips	Low Retention Tips Minimum retention = Maximum accuracy No Silicon additives = No leaching Manufactured from specially developed resins combined with high quality diamond finish mould creates super hydrophobic internal surface and ensures maximum recovery of sample yield.	<div><div>Regular Tips</div></div> <div><div>Low Retention Tips</div></div>
Packaging	 <div>Racked Racked-Sterile</div>	 <div>Reloads Reloads-Sterile</div>
Filter Dimensions	<div>Filter dimensions</div> <div><div>4.37^{±0.08} Ø3.25^{±0.25} Filter pore size- 20-40 microns</div></div>	
Order in: LTR-200-SLF		

Technical Drawing

